

QUARTET SG2



RECESSED FULLY ADJUSTABLE DOWNLIGHTS

XICATO SPOT MODULE High output LED module with internal mixing chamber and corrected cold phosphor technology. Available in various lumen outputs, colour temperatures and Ra80 and Ra95.


HEAT SINK Anodised extruded aluminium heat management system ensuring LED lifetime guarantee of 50,000 hours.

OPTICAL CONTROL Metalised spun aluminium reflectors with a range of beam angles.

DRIVER SYSTEM Range of 350mA to 700mA driver systems, which have Dali, Triac and 1-10V dimming options.

BODY Die cast aluminium fascia, powder coated steel body, rotational gimbals with 0° to 40° directional tilting angle and adjustable side arm brackets.



Xicato
Making sense with LEDs

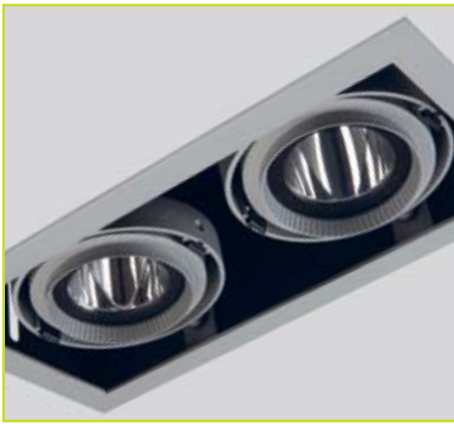

Quartet Square Gimbal 2 SG250

Model: Quartet SG250
 Beam Angle: 36° 50°
 Body Colour: Black (B) White (W) Grey (G)
 Control Gear: Standard (S) Dali (D) Triac (T) 1-10V (1-10)
 3hr Emergency: Available (E)

Xicato LED Module			
Lumens	400	700	1000
Colour Temperature		2700K	2700K
	3000K	3000K	3000K
		4000K	4000K




Cut out size: 254 mm x 130 mm



Quartet Square Gimbal 2 SG270

Model: Quartet SG270
 Beam Angle: 20° 40° 60°
 Body Colour: Black (B) White (W) Grey (G)
 Control Gear: Standard (S) Dali (D) Triac (T) 1-10V (1-10)
 3hr Emergency: Available (E)

Xicato LED Module			
Lumens	400	700	1000
Colour Temperature		2700K	2700K
	3000K	3000K	3000K
		4000K	4000K



Cut out size: 325 mm x 170 mm

Product code	Module	Control Gear	Lumens	Colour	Beam Angle	Body Colour	Emergency
	Quartet SG250	S	700	4000K	36° 50°	B	-

Change where appropriate

50K hours	Ra80	digital DALI	phased TRIAC	analogue 1-10	E	page 26 photometrics
-----------	------	--------------	--------------	---------------	---	----------------------

colours available

white grey black

high
technology
lighting