


Luminaire Data Sheet

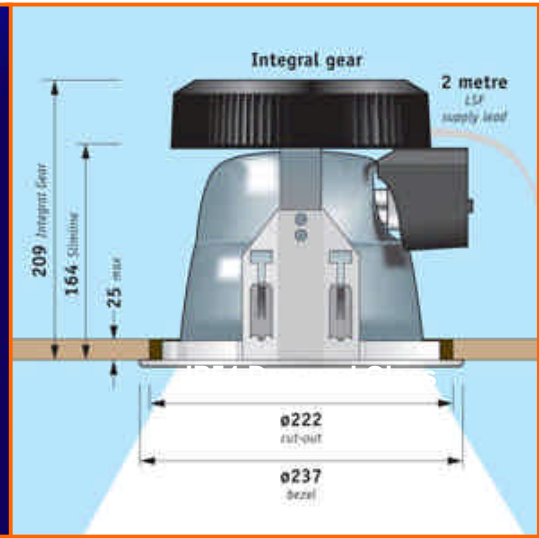

Product Range	GRAVITY
Product Reference	DL07
Description	Compact fluorescent downlight for horizontally mounted PL-c or PL-T lamps.
Principle Application	Corridors, Toilets, amenity lighting.
Lamp Type	Available in single or twin lamp versions in 18W, 26W PL-C, 32W and 42W PL-T
Lamp Cap	G24d-2 (18W PL-C) , G24d-3 (26W PL-C), GX24q-3 (32W PL-T) GX24q-4 (42W PL-T)
Control Gear	High frequency control gear..
System Power	Min 18W, max 92W
Weight	2kg max
Technical Specification	Specular diamond facet reflector, four point easy fix mounting arrangement, die cast bezel.
IP Rating	IP20
Supply Voltage	220-240V
Dimensions	Bezel 237mm diameter, Cut out 222mm diameter, 209mm high.
Mounting Arrangement	Recessed.
Mains Connection Arrangement	Terminal block.
Lighting characteristics	DLOR 71.6%, ULOR NIL, TOTAL 71.6%.

High Technology Lighting Ltd has a policy of continual design and development. As a result specifications and dimensions are subject to change without notice.